


# Temporary Strainer

## Applications

- Process Industries
- Power Generation
- Chemical Industries
- Oil & Gas
- Metals & Mining
- Water Treatment



## Standard Construction

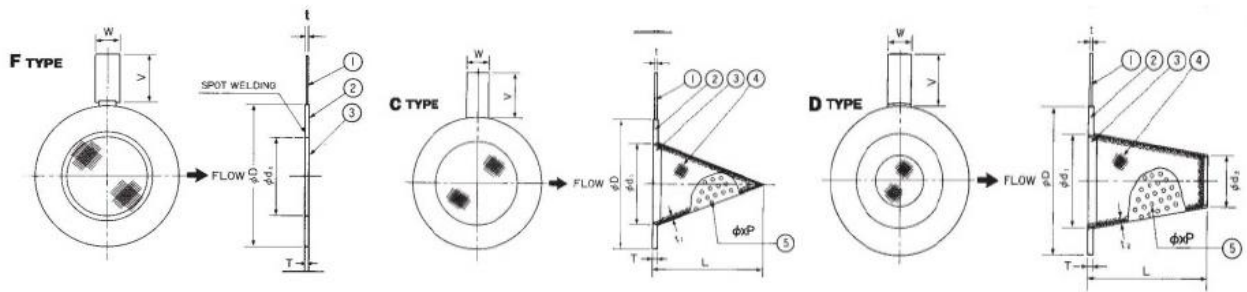

TYPE	SIZE		Ø D				Ød	Ø2	L	T	W	V	t	PUNCHING / METAL		
			JIS		ASME/JPI									Ø	p	t2
	F	C	D	10k	20k	150Lb										
		15A	55	55	45.5	51.5	13	25	2	15	50	1.5	3	5	0.8	
		20	60	60	55	63.5	18	30	2	15	50	1.5	3	5	0.8	
		25	71	71	64.5	70	23	40	2	15	55	1.5	4	6	0.8	
		32	81	81	74	79.5	30	45	2	20	55	1.5	4	6	0.8	
		40	86	86	83.5	92.5	36	50	2	20	65	1.5	4	6	0.8	
		50	101	101	101.5	108	46	60	2	20	65	1.5	6	8	0.8	
		65	121	121	120.5	127	58	70	2	20	65	1.5	6	8	0.8	
		80	131	137	133.5	146.5	70	80	2	20	75	1.5	6	8	0.8	
		100	156	162	171.5	178	92	100	2	25	85	1.5	6	8	0.8	
		125	187	200	194	213	115	120	3	25	85	1.5	12	15	1.5	
		150	217	235	219.5	248	135	140	3	25	95	1.5	12	15	1.5	
		200	267	280	276.5	305	185	190	3	25	95	1.5	12	15	1.5	
		250	330	353	337	358.5	230	230	4	30	110	2.0	12	15	2.0	
		300	375	403	407	419	270	270	4	30	130	2.0	12	15	2.0	
		350	420	447	447	482.5	305	310	4	30	130	2.0	12	15	2.0	
		400	483	507	510.5	536.5	350	350	4	30	135	2.0	12	15	2.0	
		450	538	572	546	593.5	400	410	4	40	150	3.0	12	15	2.0	
		500	593	627	603	651	450	460	4	40	150	3	12	15	2.0	